

## KMF<sup>2</sup> Microfiber Filters

flow rates	filtration degrees	water for cleaning	minimum operating pressure
up to <b>320 m<sup>3</sup>/h</b> (1400 US gpm)	<b>20-2</b> micron	less than <b>1%</b> of the total flow	<b>1 bar</b> (15 psi)

Innovative self-cleaning microfiber water filters for treatment as fine as 2 micron.



### features:

- TSS, NTU & SDI reduction for potable and waste water applications
- Effective removal of Giardia Cysts
- Cartridge performance without cartridge replacement
- Outperforms traditional sand media systems
- Pre-filtration for R.O. desalination and other sub micron systems
- Provide complete water treatment and filtration solutions for Municipalities
- Environmentally friendly no chemical treatment required

## Technical Specifications

Filter Type	KMF-36K	KMF-93K	KMF-370K
<b>General Data</b>			
Recommended flow rate*	Up to 30 m <sup>3</sup> /h (132 US gpm)	Up to 30 m <sup>3</sup> /h (132 US gpm)	Up to 30 m <sup>3</sup> /h (132 US gpm)
Inlet/Outlet diameter	1x2" (1x50 mm)	1x4" (1x100 mm)	2x8" 2x200 mm
Standard filtration degrees	2-3 -7-10 -20 micron		
Min. working pressure	1 bar (15 psi) or lower Please consult manufacturer.		
Max. working pressure	10 bar (145 psi)		
Working temperature range	4-40°C (39 -104°F)		
Electrical Supply	3 Faz, 220/ 380/ 440 VAC 50/60 Hz		
Compressed Air Supply	6 - 8 bar / 87 - 116 psi		
Weight (empty)	480 kg	650 kg	2150 kg

\* Depending on water quality and application

<b>Flushing Data</b>			
Flushing Flow Rate	6 m <sup>3</sup> /h (26 US gpm)	6 m <sup>3</sup> /h (26 US gpm)	20 m <sup>3</sup> /h (88 US gpm)
Reject water volume per flush cycle	0.5 - 0.7 m <sup>3</sup> (132 - 185 US gallon)	1.1 – 1.5 m <sup>3</sup> (290 - 396 US gallon)	3.5 - 5 m <sup>3</sup> (925 - 1320 US gallon)
Flushing sequence time	Approximately 10 minutes Including drainage and filling time.		
Exhaust valve	50 mm 2"	80 mm 3"	100 mm 4"
Flushing criteria	Differential pressure, time intervals and manual operation		

<b>Filter Element Data</b>			
Filter area	35580 cm <sup>2</sup> (5515 in <sup>2</sup> )	92500 cm <sup>2</sup> (14340 in <sup>2</sup> )	370000 cm <sup>2</sup> (57350 in <sup>2</sup> )

<b>Control and Electricity</b>	
Rated operation voltage	3 phase, 220/ 380/ 440 VAC 50/60 Hz
Control voltage	24 V AC /DC

<b>*Construction Materials</b>	
Filter housing and covers	Epoxy coated carbon steel
Cassette	Polyester thread on Noryl® molded base
Cassette package	PVC, St/St, PTFE
Pistons	Brass, Bronze, HMWPE, St/St, Nylon, PTFE
Seals	Nitrile Rubber (NBR)
Pressure hoses	Rubber
Bolts, nuts, washers	External Galvanized, Internal St/St
Pneumatic valves	Cast Iron, EPDM, Brass, St/St
Solenoid valves	Aluminum (pneumatic control of valves), Brass (hydraulic control of pistons)

\* T O E offers a variety of construction materials. Please consult us for specifications.

# How the KMF<sup>2</sup> Filters work

## General

MASA's KMF<sup>2</sup> Series consists of innovative self-cleaning microfiber water-filters for treatments as fine as 2 micron that provides cartridge filter performance without cartridge filter replacement. The KMF<sup>2</sup> filters support flow-rates of up to 320 m<sup>3</sup>/h (1410 US gpm), in filtration degrees of 20 to 2 micron.

## The Filtering Process

The KMF<sup>2</sup> filters remove dirt particles as water flows through multi-layered microfiber cassettes (1). These are attached to collector pipes which allow the process water to flow from the filter. Dirt particles that accumulate on and in-between the microfiber layers create a pressure differential. At a preset pressure differential value or time interval, the control unit activates the self-cleaning cycle, described as follows:


### Self-Cleaning Cycle

The inlet (3) and outlet (4) valves close and the drain (5) valve opens. After the filter vessel empties, the booster pump (6) delivers pressurized water to the shuttle pipe (7) on which the flush nozzles are mounted (8). These nozzles straddle the cassettes and spray both sides of a cassette with high powered jet streams that penetrate the microfiber layers and dislodge the debris. When these jet streams hit the plastic cassette support, they reflect outward, dislodging the debris from the cassettes and out the drain. This process ensures 100% effective cleaning. The piston assembly shuttles the spray nozzles across a single row of cassettes on each stroke. When the nozzles reach the end of a row, the turn mechanism indexes the filter package to the next row of cassettes. The piston then shuttles in the opposite direction, cleaning the cassettes as the nozzles traverse them. After cleaning all 35 rows of cassettes, the filter is clean. The drain valve closes and the inlet valve re-opens, filling the filter vessel. After the vessel is full, a "filter to waste" (9) valve opens. This eliminates any residual contaminant that may have entered the collector pipes during the flush process. Then, the "filter to waste" valve closes, the outlet valve opens and the filter is back on-line.


## KMF<sup>2</sup> Models

Timex's KMF<sup>2</sup> product-line consists of the following models:


- KMF<sup>2</sup>-36K for up to 30 m<sup>3</sup>/h (132 US gpm)
- KMF<sup>2</sup>-93K for up to 50 m<sup>3</sup>/h (220 US gpm)
- KMF<sup>2</sup>-370K for up to 320 m<sup>3</sup>/h (1410 US gpm)

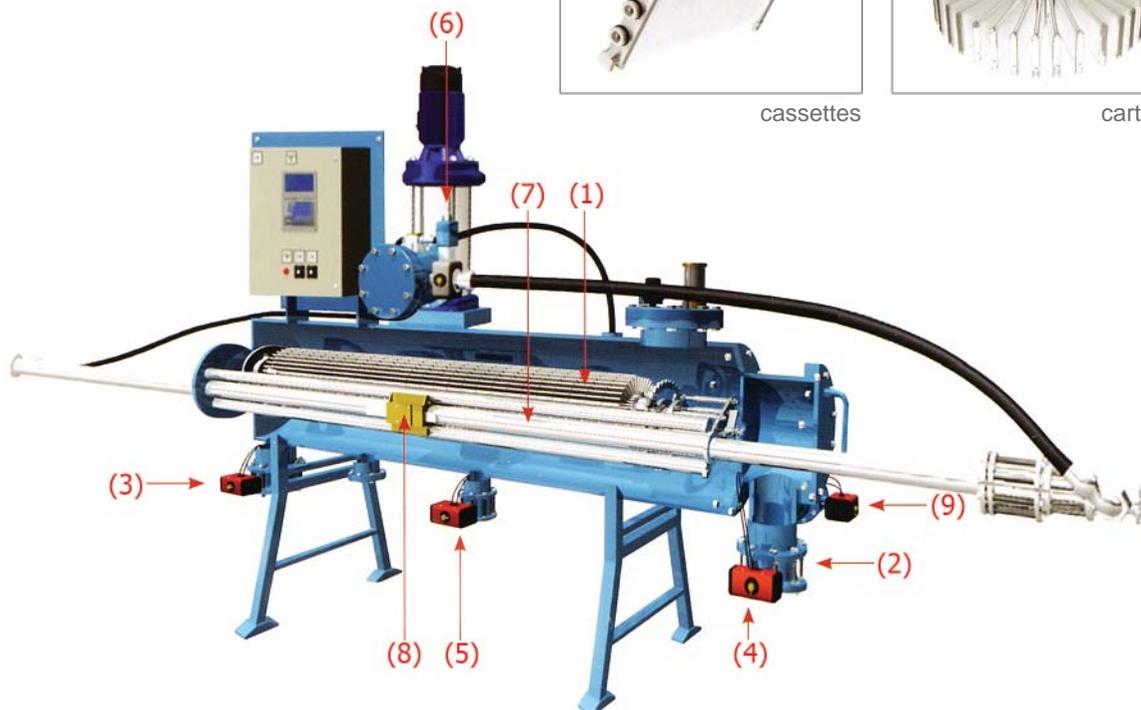


## KMF<sup>2</sup> 36K

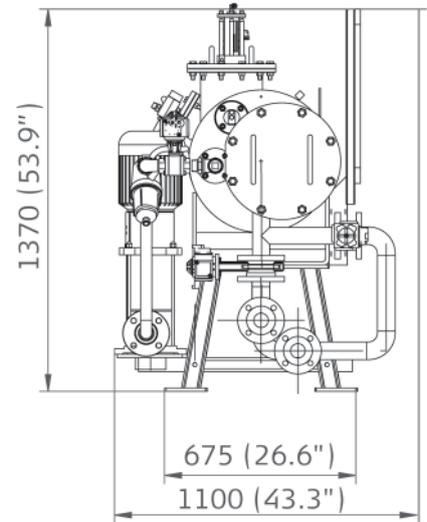

## KMF<sup>2</sup> 93K

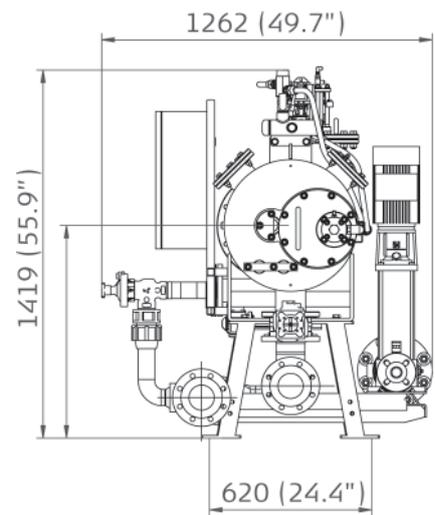

## KMF<sup>2</sup> 370K

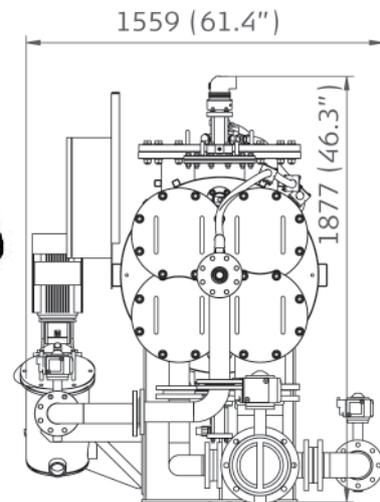

Dim. In mm (inch)

\*Approx. length required for maintenance





## industry

Automotive, Aviation, Ballast treatment, Electronics, Food & Beverage; Mining, Oil & Gas, Petrochemical, Power Generation, Pulp & Paper



## municipal

Potable Water, Waste Water, Desalination, Brackish Water, High rise buildings, Pre-filtration to Membranes



## irrigation

Agriculture, Golf & Turf, Aquaculture, Green Houses

---

REGIONAL OFFICE  
MASA FILTRATION SDN BHD (CO. NO.: 806767-U)  
Tel: (603) 9235 1013 Fax: (603) 9235 1023  
E-mail: [info@masafilter.com](mailto:info@masafilter.com)  
Website: [www.masafilter.com](http://www.masafilter.com)

---